


# Data Sheet: RG BSEN


Steel encapsulated/particle board construction, loose laid raised access floor panels to the requirements of BSEN 12825

## Feature Benefits

- High edge strength reducing edge to edge deflection
- Precision construction and location for a accurate floor grid
- Solid underfoot
- Steel wrap round design ensures excellent electrical continuity is maintained
- Good acoustic performance
- Safe and easy access
- Excellent lateral stability
- 600mm x 900mm oversize panels available in order to minimise perimeter cutting
- The system meets EN13501 Parts 1 & 2 and also its construction provides Class O to BS476 fire rating

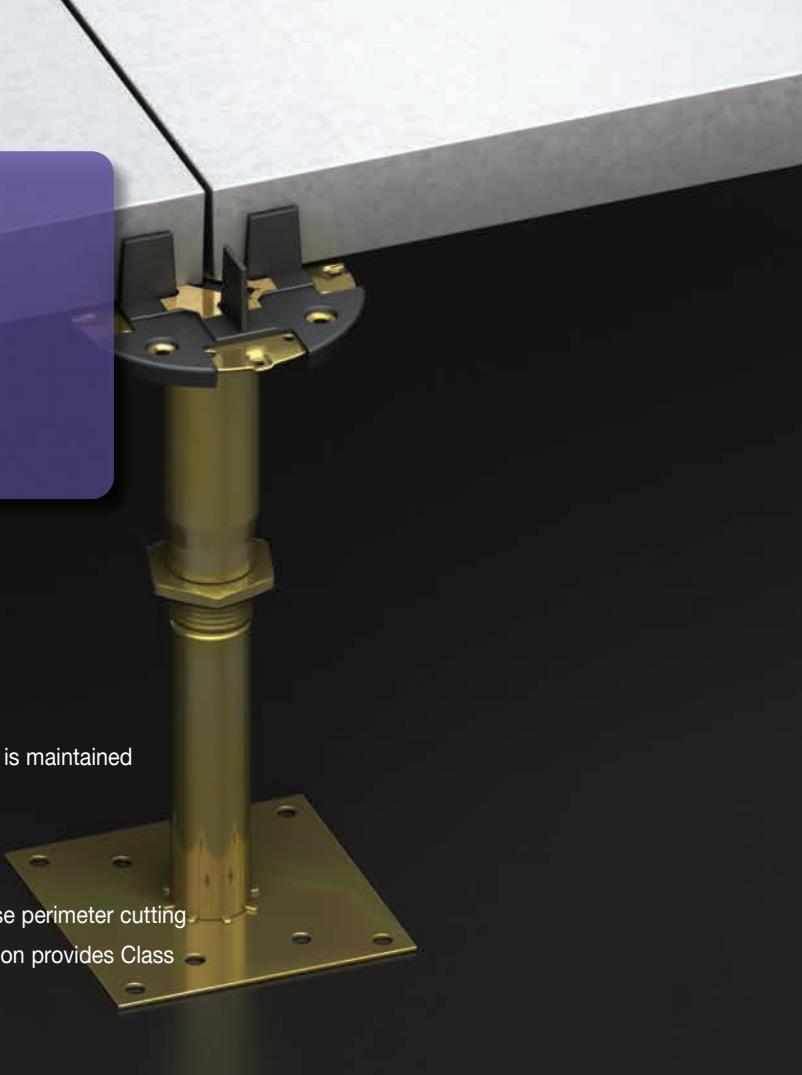

## Corner Detail



## Typical Areas of Application

General office areas, light and medium use.


## Description

This loose laid floor panel range is fully rated to the requirements of the Harmonised European Standard for raised access floors, BSEN 12825. The design incorporates a unique wrap-around construction which makes panel removal and replacement easy. This design also improves panel edge strength and accessibility.

With a wide range of optional factory accessories and applied finishes this panel construction is at the heart of the range of raised floor systems available from Kingspan Access Floors.

This RG series of panels is world renowned for its exceptional characteristics of strength and durability.

## Panel Illustration



|                    |   |
|--------------------|---|
| Category           | Loose lay   |
| Panel Size         | 600mm square                                      |
| Core Material      | High Density Particle Board                       |
| Panel Construction | Galvanised steel encapsulated particle board core |

|     | Panel Thickness (nominal) excluding covering | System Weight (typical) |
|-----|--|-------------------------|
| RG3 | 31mm   | 31kg/m <sup>2</sup>     |
| RG5 | 31mm   | 36kg/m <sup>2</sup>     |
| RG6 | 32mm   | 44kg/m <sup>2</sup>     |

## Construction

These floor panels are based on a 600mm square module constructed around a high performance chipboard core. The galvanised steel shell comprises of a top sheet that is wrapped around and laminated to the particle board core. This is then mechanically stitched to the bottom steel sheet for greater strength and to provide full electrical continuity of the system.

Positive location and retention of the floor panel is achieved by the use of a moulded plastic cap.

# Data Sheet: RG BSEN

## Structural Performance

| Panel Type | BSEN 12825 Classification | Ultimate Load     |
|------------|---------------------------|-------------------|
| RG3        | 3/A/3/2                   | In excess of 8kN  |
| RG5        | 5/A/3/2                   | In excess of 10kN |
| RG6        | 6/A/3/2                   | In excess of 12kN |

- The above information is based on testing in compliance with the BSEN 12825 specification. The classifications shown are based on a deflection under working load not exceeding 2.5mm and a safety factor of 3.
- Finished floor heights from 65mm to 380mm are available using one of our standard pedestals. For heights outside of this range alternative pedestals are available.
- The classifications given are based on the use of the Kingspan range of pedestals.

## Special Applications

|                             |  |
|-----------------------------|--|
| Acoustic Performance        | Airborne sound insulation rating in the range of 38-44dB, impact sound insulation rating in the range of 67-69dB. These are indicative laboratory figures for the bare panel only with no barrier in the void. These ratings are determined according to BS EN 717-2 1997. The tests were carried out in accordance with BS EN 140-3 and BS EN 140-12. |
| Air Seals                   | Used to minimise air leakage through raised floor, air leakage of 0.44litres/sec/m <sup>2</sup> at a pressure of 25Pa. This is an indicative figure only based upon laboratory testing.  |
| Bridging Sections           | Where obstructions in the void prevent the use of pedestals.   |
| Foil Tape                   | Aluminium foil tape to seal the edge of cut panels.  |
| Pedestal Mechanical Fixings | To fix pedestals to floor in addition to adhesive for greater rigidity at increased floor heights/increased loadings or in situations where the sub-floor requires additional fixing.  |
| Pedestal Earth Clamps       | Provides an electrical connection to the floor system for earth bonding purposes. All conductive components of the raised access floor must be earth bonded in accordance with BS 7671-2008, 17th Edition Wiring Regulations.  |
| Perimeter Gasket            | 20 x 9mm foam tape applied to the panel edge between floor and wall if required.   |
| Ramps and Steps             | Provided to accommodate changes in floor level.  |
| Simploc                     | Factory applied variation to allow panels to be screw fixed to pedestals.  |
| Stringers                   | <i>Snap on</i> :- provide additional lateral stability at increased floor heights.<br><i>Bolt on</i> :- provide additional lateral stability and increased load bearing properties.  |

**CONNAUGHT**

For more information  
please call 01245 237 527  
or visit us at  
[www.connaughtfloors.com](http://www.connaughtfloors.com)



**Kingspan**®